


# LISOFLOOR 3000

Transparent resin for concrete floors with anti-slip option

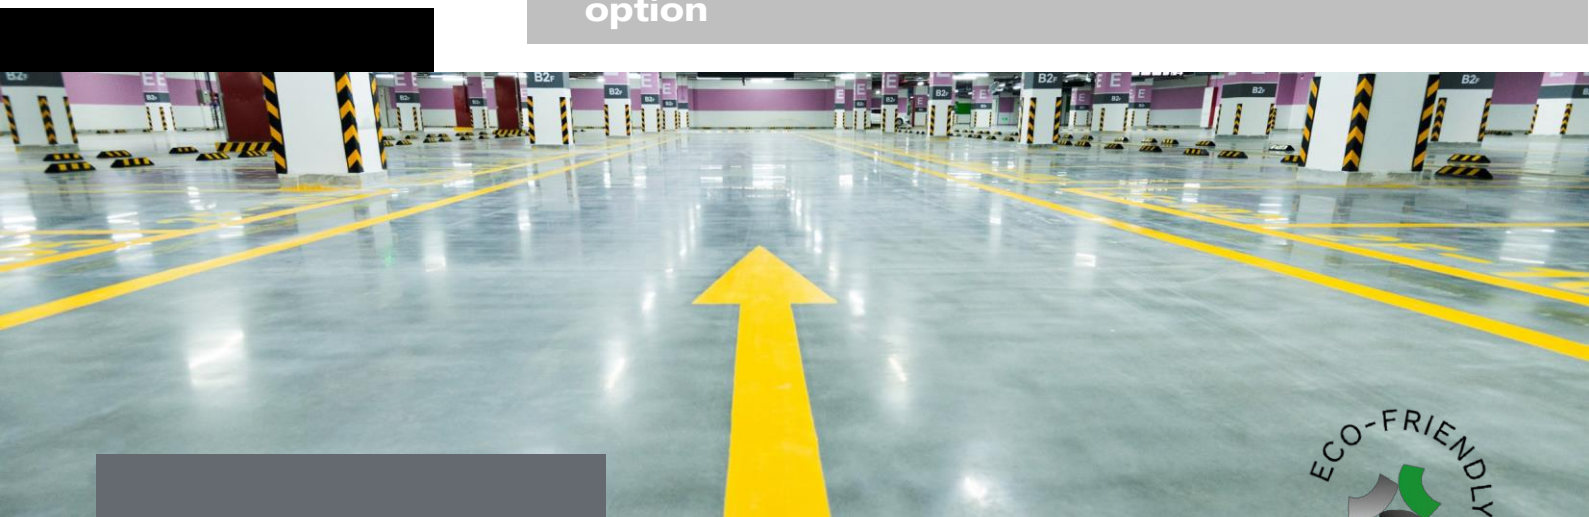

The green power  
for your concrete

## CHARACTERISTICS

LisoFloor 3000 is a transparent topcoat for concrete floors. This easy-to-use, roller-applied, resin-based solution provides a semi-matt finish, and is also available as an anti-slip solution.  
AS : Anti-Slip

## PRODUCT DESCRIPTION

Acrylic resin-based product for new and old concrete surfaces which, after 5 days, provides excellent abrasion resistance, waterproofing, dustproofing, waterproofing and resistance to many chemicals (such as oil, citrus juices, milk, vinegar and water).

Water-based, solvent-free product with very low VOC emissions.

### LisoChem SRL

Rue de Le Mesnil, 34  
5670 Viroinval  
(Belgium)  
Phone: +32 60 490 190  
Mobile: +32 483 367 323  
[www.lisochem.com](http://www.lisochem.com)  
[info@lisochem.com](mailto:info@lisochem.com)

### Manufacture & Office

Rue des Mousquetaires Gris  
35 ZI de Mariembourg  
5660 Belgium  
Phone: +32 60 490 190  
Mobile: + 32 483 367 323

# LISOFLOOR 3000

Transparent resin for concrete floors with anti-slip option

*The Green Power for your Concrete*

## BENEFITS

LisoFloor 3000 :

- Acrylic resin-based product
- For new and old concrete surfaces
- Excellent abrasion and dust resistance
- Excellent waterproofing and resistance to a wide range of chemicals, and also available in an anti-slip version
- Water-based product, with very low VOC emissions

## USE

New or old concrete

For medium traffic: pedestrian

## SECURITY

Please refer to the safety data sheet :

- Keep out of reach of children
- Protect from freezing
- Wear gloves and safety glasses
- Cover all metal and glass parts before application

## PROPERTIES

Transparent

Color : 5 RAL available

Density : 1,1

Shelf life: 6 months in original, closed container

# LISOFLOOR 3000

Transparent resin for concrete floors with anti-slip option

*The Green Power for your Concrete*

## PREPARATION, APPLICATION, MAINTENANCE

### General notes :

- Never apply in frost or rain. Never dilute or add other products or liquids to the base product.
- It is very important to mix LisoFloor products thoroughly before and during use.
- Never polish or buff the surface!

### Preparation and application : (See application system)

Never apply when it's freezing, raining or very hot. Ideal temperature between 8° C and 27° C.

- Clean surface several times with vacuum cleaner and scrubber-dryer.
- Mix well
- Apply a 1st coat with a roller (approx. 8 m<sup>2</sup>/L)
- Allow to dry for at least 45 minutes
- Apply 2nd coat by roller (approx. 10 m<sup>2</sup>/L)
- Allow to dry for at least 45 minutes
- Allow to dry for at least 24 hours for pedestrian traffic and 7 to 8 days for heavier traffic and optimum efficiency

### Maintenance :

Clean surfaces at least once a week with a scrubber-dryer and neutral soap

## PACKAGING

Bucket..... 20L